


15A Single-Phase GLass Passivated Bridge Rectifiers


Recifier Reverse Voltage 50V to 1000V



Features

- Rating to 1000V PRV
- Ideal for printed circuit board
- Low forward voltage drop, high current capability
- Reliable low cost construction utilizing molded plastic technique results in inexpensive product
- The plastic material has U/L flammability classification 94V-0
- Weight: 0.11 ounce, 4.24 grams (approx)

KBJ

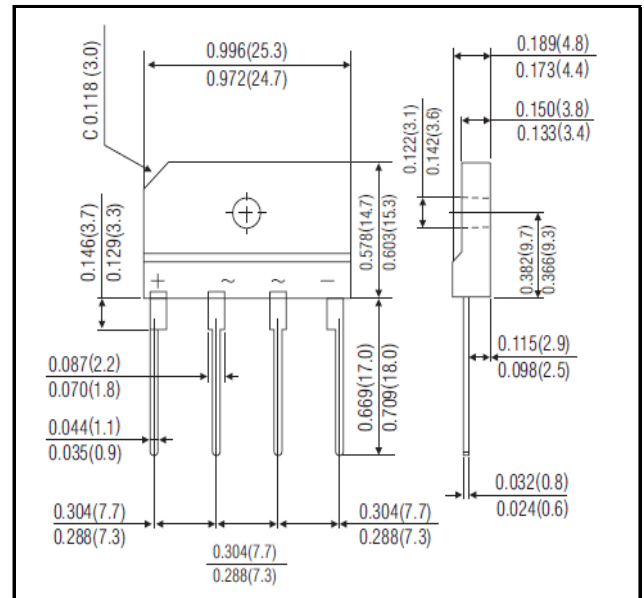

Maximum Ratings & Thermal Characteristics

Dimensions in inches and (millimeters)

Rating at 25°C ambient temperature unless otherwise specified, Resistive or inductive load, 60HZ.

For Capacitive load derate current by 20%

Parameter	Symbol	KBJ 15005	KBJ 1501	KBJ 1502	KBJ 1504	KBJ 1506	KBJ 1508	KBJ 1510	unit	
Maximum repetitive peak reverse voltage	VRRM	50	100	200	400	600	800	1000	V	
Maximum RMS bridge input voltage	VRMS	35	70	140	280	420	560	700	V	
Maximum DC blocking voltage	VDC	50	100	200	400	600	800	1000	V	
Maximum average forward rectified output current at TA=40°C	IF(AV)	15.0								A
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	IFSM	3.2								A
Maximum instantaneous forward voltage drop per leg at 7.5A DC	VF	240								V
Maximum DC reverse current at ratde TA=25°C	IR	1.1								UA
DC blocking voltage per element TA=125°C		10								UA
Rating for fusing(t<8.3ms)	I ² t	500								A ² sec
Typical thermal resistance per element(1)	ReJA	239								°C/w
Mounting torque(Suggests 045~0.65)	Tor	0.8								N.m
Typical thermal resistance per element(2)	Cj	Rating Torque:0.8(Suggests 045~0.65)								PF
Operating junction and stroage temperature range	TJ, TSTG	60.0								°C
		-55to+150								

Notes:(1)Device mounted on 300mm*300mm*1.6mm Cu plate heatsink.

(2)Measured at 1.0MHz and applied reverse voltage of 4.0 volts.

Rating and Characteristic Curves (TA=25°C Unless otherwise noted)

