


6.0A Single-Phase Glass Passivated Bridge Rectifiers

Recifier Reverse Voltage 50V to 1000V



D3K

Features

- Glass passivated junction
- The plastic material used carries Underwriters Laboratory flammability recognition 94V-0
- Suge overload ratings to 170 amperes peak
- Ideal for printed circuit board application
- Solder dip 275 °C max. 7 s, per JESD 22-B106


Mechanical Data

Case: Molded plastic

Terminals: Tin plated leads, solderable per J-STD-002 and JESD22-B102

Polarity: Polarity symbols molded or Marked on body

Mounting Position: Any

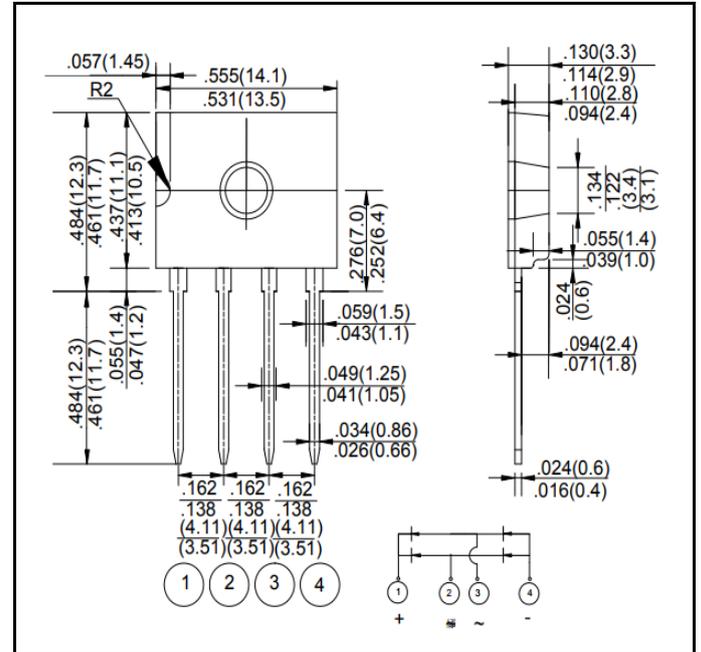

Maximum Ratings & Thermal Characteristics

Dimensions in inches and (millimeters)

Rating at 25°C ambient temperature unless otherwise specified, Resistive or inductive load, 60HZ.

For Capacitive load derate current by 20%

Parameter	Symbol	D6UB05	D6UB10	D6UB20	D6UB40	D6UB60	D6UB80	D6UB100	unit	
Maximum repetitive peak reverse voltage	VRRM	50	100	200	400	600	800	1000	V	
Maximum RMS bridge input voltage	VRMS	35	70	140	280	420	560	700	V	
Maximum DC blocking voltage	VDC	50	100	200	400	600	800	1000	V	
Average rectified output current @60Hz sine wave, R-load	IF(AV)	With heatsink Tc = 140°C							6.0	A
		Without heatsink Ta = 29°C							1.5	
Peak forward surge current single sine-wave superimposed on rated load (JEDEC Method)	IFSM	170							A	
Rating for fusing(t<8.3ms)	I ² t	120							A ² sec	
Maximum instantaneous forward voltage drop per leg at 3A	VF	1.00							V	
Typical thermal resistance to ambient (without heatsink)	R _{θJA}	45							°C/w	
Typical thermal resistance to case (with heatsink)(Note1)	R _{θJC}	6							°C/w	
Typical thermal resistance to lead (without heatsink)	R _{θJL}	9							°C/w	
Mounting torque(Suggests 045~0.65)	Tor	Rating Torque:0.8(Suggests 045~0.65)							N.m	
Maximum DC reverse current at rated @T _J =25°C	IR	5							μA	
DC blocking voltage per element @T _J =125°C		500								
Operating junction temperature range	T _J	-55to+150							°C	
Stroage temperature range	TSTG	-55to+150							°C	

Notes: (1) Device mounted on 75mm*75mm*1.6mm Cu plate heatsink.

(2) The typical data above is for reference only

Rating and Characteristic Curves (TA=25°C Unless otherwise noted)

FIG.1-DERATING CURVE FOR

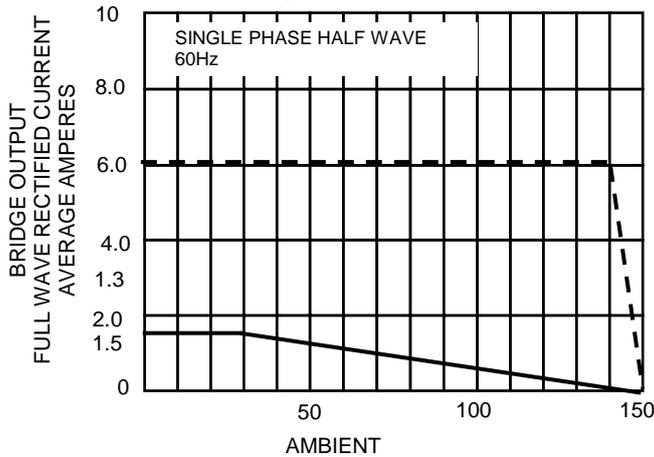


FIG.2-MAXIMUM NON-REPETITIVE SURGE CURRENT

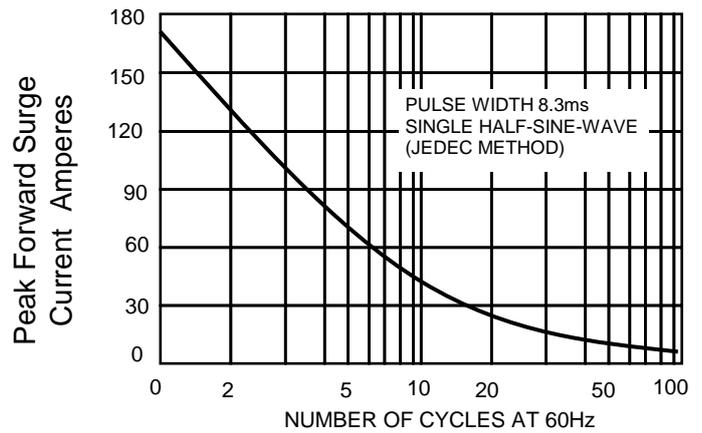


FIG.3-TYPICAL REVERSE CHARACTERISTICS

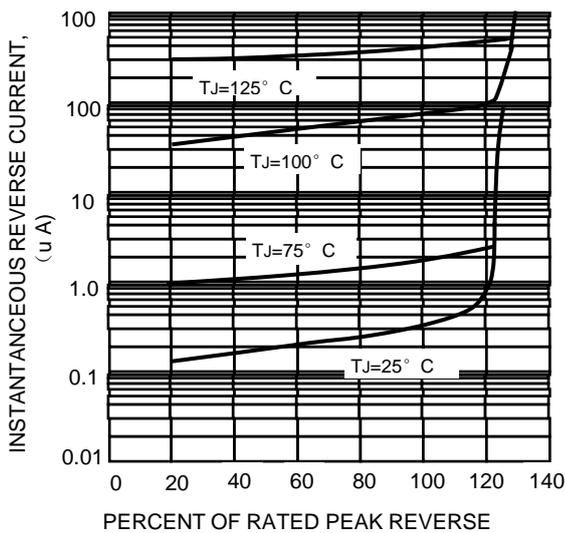


FIG.4-TYPICAL FORWARD CHARACTERISTICS

